



## SECURE AUDITING AND DEDUPLICATING DATA IN CLOUD

K ANIL<sup>1</sup>, P.KARUNAKAR REDDY<sup>2</sup>

<sup>1</sup>M.Tech Student, Sree Rama institute of technology and science

Kuppenakuntla, Penuballi, Khammam, TS INDIA

<sup>2</sup>Asst Prof, CSE Dept Sree Rama institute of technology and science

Kuppenakuntla, Penuballi, Khammam, TS INDIA

### **ABSTRACT:**

As the cloud computing technology develops during the last decade, outsourcing data to cloud service for storage becomes an attractive trend, which benefits in sparing efforts on heavy data maintenance and management. Nevertheless, since the outsourced cloud storage is not fully trustworthy, it raises security concerns on how to realize data deduplication in cloud while achieving integrity auditing. In this work, we study the problem of integrity auditing and secure deduplication on cloud data.

Specifically, aiming at achieving both data integrity and deduplication in cloud, we propose two secure systems, namely SecCloud and SecCloud+. SecCloud introduces an auditing entity with a maintenance of a MapReduce cloud, which helps clients generate data tags before uploading as well as audit the integrity of data having been stored in cloud. Compared with previous work, the computation by user in SecCloud is greatly reduced during the file uploading and auditing phases. SecCloud+ is designed motivated by the fact that customers



always want to encrypt their data before uploading, and enables integrity auditing and secure deduplication .

Index Terms—Access control, multi-authority, CP-ABE, attribute revocation, cloud storage

## INTRODUCTION:

CLOUDstorage is an important service of cloud computing , which offers services for data owners to host their data in the cloud. This new paradigm of data hosting and data access services introduces a great challenge to data access control. Because the cloud server cannot be fully trusted by data owners, they can no longer rely on servers to do access control. Ciphertext-Policy Attribute-based Encryption (CP-ABE) is regarded as one of the most suitable technologies for data access control in cloud storage systems, because it

gives the data owner more direct control on access policies. In CP-ABE scheme, there is an authority that is responsible for attribute management and key distribution. The authority can be the registration office in a university, the human resource department in a company, etc. The data owner defines the access policies and encrypts data according to the policies. Each user will be issued a secret key reflecting its attributes. A user can decrypt the data only when its attributes satisfy the access policies.

There are two types of CP-ABE systems: single-authority CP-ABE, where all attributes are managed by a single authority, and multi-authority CP-ABE ,where attributes are from different domains and managed by different authorities. Multi-authority CP-ABE is more appropriate for data access control of cloud storage systems, as users may



hold attributes issued by multiple authorities and data owners may also share the data using access policy defined over attributes from different authorities. For example, in an E-health system, data owners may share the data using the access policy “Doctor AND Researcher”, where the attribute “Doctor” is issued by a medical organization and the attribute “Researcher” is issued by the administrators of a clinical trial. However, it is difficult to directly apply these multi-authority CP-ABE schemes to multi-authority cloud storage systems because of the attribute revocation problem

### **Existing System:**

#### **System Model**

We consider a data access control system in multi-authority cloud storage, as described in Fig. 1. There are five types of entities in the

system: a certificate authority (CA), attribute authorities (AAs), data owners (owners), the cloud server (server) and data consumers (users). The CA is a global trusted certificate authority in the system. It sets up the system and accepts the registration of all the users and AAs in the system. For each legal user in the system, the CA assigns a global unique user identity to it and also generates a global public key for this user. However, the CA is not involved in any attribute management and the creation of secret keys that are associated with attributes. For example, the CA can be the Social Security Administration, an independent agency of the United States government. Each user will be issued a Social Security Number (SSN) as its global identity. Every AA is an independent attribute authority that is responsible for entitling and revoking user’s attributes according

to their role or identity in its domain. In our scheme, every attribute is associated with a single AA, but each AA can manage an arbitrary number of attributes. Every AA has full control over the structure and semantics of its attributes. Each AA is responsible for generating a public attribute key for each attribute it manages and a secret key for each user reflecting his/her attributes.

detailed construction of our access control scheme which consists of five phases: System Initialization, Key Generation, Data Encryption, Data Decryption and Attribute Revocation. To design the data access control scheme for multi authority cloud storage systems, the main challenging issue is to construct the underlying Revocable Multiauthority

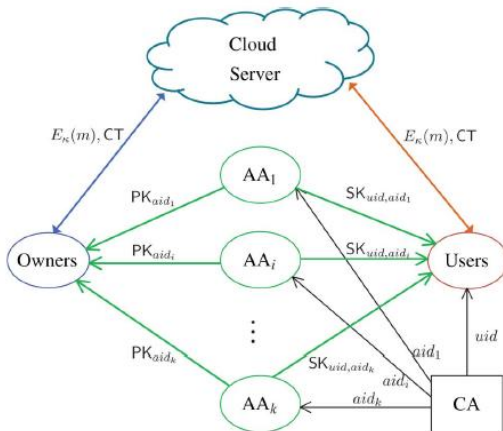


Fig. 1. System model of data access control in multi-authority cloud storage.

### Proposed System:

In this section, we first give an overview of the challenges and techniques. Then, we propose the

CP-ABE protocol. In [6], Chase proposed a multi-authority CP-ABE protocol, however, it cannot be directly applied as the underlying techniques because of two main reasons: 1) Security Issue: Chase's multi-authority CP-ABE protocol allows the central authority to decrypt all the ciphertexts, since it holds the master key of the system; 2) Revocation Issue: Chase's protocol does not support attribute revocation. We propose a new revocable multi-authority CP-ABE



protocol based on the single-authority CP-ABE proposed by Lewko and Waters in [16]. That is we extend it to multiauthority scenario and make it revocable. We apply the techniques in Chase's multi-authority CP-ABE protocol [6] to tie together the secret keys generated by different authorities for the same user and prevent the collusion attack. Specifically, we separate the functionality of the authority into a global certificate authority (CA) and multiple attribute authorities (AAs). The CA sets up the system and accepts the registration of users and AAs in the system.<sup>7</sup> It assigns a global user identity  $uid$  to each user and a global authority identity  $aid$  to each attribute authority in the system. Because the  $uid$  is globally unique in the system, secret keys issued by different AAs for the same  $uid$  can be tied together for

decryption. Also, because each AA is associated with an  $aid$ , every attribute is distinguishable even though some AAs may issue the same attribute.

## SECURITY ANALYSIS

We prove that our data access control is secure under the security model we defined, which can be summarized as in the following theorems.

### Backward Security:

During the secret key update phase, the corresponding AA generates an update key for each non-revoked user. Because the update key is associated with the user's global identity  $uid$ , the revoked user cannot use update keys of other non-revoked users to update its own secret key, even if it can compromise some non-revoked users. Moreover, suppose the



revoked user can corrupt some other AAs (not the AA corresponding to the revoked attributes), the item  $H_{\text{aid}} \oplus v_{\text{aid}} \oplus \text{aid} \oplus \text{aid}$  in the secret key can prevent users from updating their secret keys with update keys of other users, since  $\text{aid}$  is only known by the  $\text{AA}_{\text{aid}}$  and kept secret to all the users. This guarantees the backward security.

#### **Forward Security:**

After each attribute revocation operation, the version of the revoked attribute will be updated. When new users join the system, their secret keys are associated with attributes with the latest version. However, previously published ciphertexts are encrypted under attributes with old version. The ciphertext update algorithm in our protocol can update previously published ciphertexts into the latest attribute version, such that newly joined users can still decrypt

previously published ciphertexts, if their attributes can satisfy access policies associated with ciphertexts. This guarantees the forward security.

#### **RELATED WORK**

Ciphertext-Policy Attribute-Based Encryption (CP-ABE) [2]-[3] is a promising technique that is designed for access control of encrypted data. There are two types of CP-ABE systems: single authority CP-ABE where all attributes are managed by a single authority, and multi-authority CP-ABE, where attributes are from different domains and managed by different authorities. Multi-authority CP-ABE is more appropriate for the access control of cloud storage systems, as users may hold attributes issued by multiple authorities and the data owners may share the data using access policy defined over attributes from different authorities. However, due to the



attribute revocation problem, these multi-authority CP-ABE schemes cannot be directly applied to data access control for such multi-authority cloud storage systems.

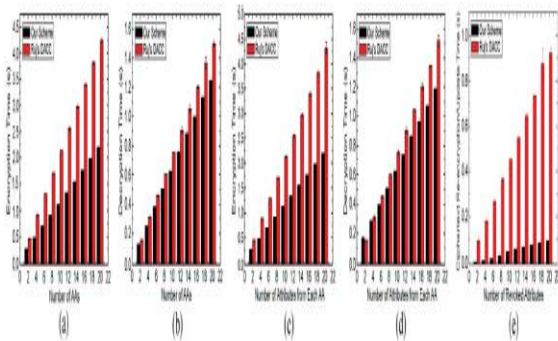


Fig. 3. Comparison of Computation Time. (a) Encryption. (b) Decryption. (c) Encryption. (d) Decryption. (e) Re-encryption.

## CONCLUSION

Aiming at achieving both data integrity and deduplication in cloud, we propose SecCloud and SecCloud+. SecCloud introduces an auditing entity with maintenance of a MapReduce cloud, which helps clients generate data tags before uploading as well as audit the integrity of data having been stored

in cloud. In addition, SecCloud enables secure deduplication through introducing a Proof of Ownership protocol and preventing the leakage of side channel information in data deduplication. Compared with previous work, the computation by user in SecCloud is greatly reduced during the file uploading and auditing phases. SecCloud+ is an advanced construction motivated by the fact that customers always want to encrypt their data before uploading, and allows for integrity auditing and secure deduplication directly on encrypted data

## ACKNOWLEDGMENT

This work was supported by the Research Grants Council of Hong Kong under Project CityU 114112.

## REFERENCES



[1] P. Mell and T. Grance, "The NIST Definition of Cloud Computing," National Institute of Standards and Technology, Gaithersburg, MD, USA, Tech. Rep., 2009.

[2] J. Bethencourt, A. Sahai, and B. Waters, "Ciphertext-Policy Attribute-Based Encryption," in Proc. IEEE Symp. Security and Privacy (S&P'07), 2007, pp. 321-334.

[3] B. Waters, "Ciphertext-Policy Attribute-Based Encryption: An Expressive, Efficient, and Provably Secure Realization," in Proc. 4th Int'l Conf. Practice and Theory in Public Key Cryptography (PKC'11), 2011, pp. 53-70.

[4] V. Goyal, A. Jain, O. Pandey, and A. Sahai, "Bounded Ciphertext

Policy Attribute Based Encryption," in Proc. 35th Int'l Colloquium on Automata, Languages, and Programming (ICALP'08), 2008, pp. 579-591.

[5] A.B. Lewko, T. Okamoto, A. Sahai, K. Takashima, and B. Waters, "Fully Secure Functional Encryption: Attribute-Based Encryption and (Hierarchical) Inner Product Encryption," in Proc. Advances in Cryptology-EUROCRYPT'10, 2010, pp. 62-91.

[6] M. Chase, "Multi-Authority Attribute Based Encryption," in Proc. 4th Theory of Cryptography Conf. Theory of Cryptography (TCC'07), 2007, pp. 515-534.

[7] M. Chase and S.S.M. Chow, "Improving Privacy and Security in Multi-Authority Attribute-Based Encryption," in Proc. 16th





ACM Conf. Computer and Comm. Security (CCS'09), 2009, pp. 121-130.

[8] A.B. Lewko and B. Waters, "Decentralizing Attribute-Based Encryption," in Proc. Advances in Cryptology-EUROCRYPT'11, 2011, pp. 568-588.

[9] S. Yu, C. Wang, K. Ren, and W. Lou, "Attribute Based Data Sharing with Attribute Revocation," in Proc. 5th ACM Symp. Information, Computer and Comm. Security (ASIACCS'10), 2010, pp. 261-270.

[10] M. Li, S. Yu, Y. Zheng, K. Ren, and W. Lou, "Scalable and Secure Sharing of Personal Health Records in Cloud Computing Using Attribute-Based Encryption," IEEE Trans. Parallel Distributed

Systems, vol. 24, no. 1, pp. 131-143, Jan. 2013.

[11] J. Hur and D.K. Noh, "Attribute-Based Access Control with Efficient Revocation in Data Outsourcing Systems," IEEE Trans. Parallel Distributed Systems, vol. 22, no. 7, pp. 1214-1221, July 2011.

[12] S. Jahid, P. Mittal, and N. Borisov, "Easier: Encryption-Based Access Control in Social Networks with Efficient Revocation," in Proc. 6th ACM Symp. Information, Computer and Comm. Security (ASIACCS'11), 2011, pp. 411-415.

[13] S. Ruj, A. Nayak, and I. Stojmenovic, "DACC: Distributed Access Control in Clouds," in Proc. 10th IEEE Int'l Conf. TrustCom, 2011, pp. 91-98.



[14] K. Yang and X. Jia, "Attribute-Based Access Control for Multi-Authority Systems in Cloud Storage," in Proc. 32th IEEE Int'l Conf. Distributed Computing Systems (ICDCS'12), 2012, pp. 1-10.

[15] D. Boneh and M.K. Franklin, "Identity-Based Encryption from the Weil Pairing," in Proc. 21st Ann. Int'l Cryptology Conf.: Advances in Cryptology - CRYPTO'01, 2001, pp. 213-229.

[16] A.B. Lewko and B. Waters, "New Proof Methods for Attribute-Based Encryption: Achieving Full Security through Selective Techniques," in Proc. 32st Ann. Int'l Cryptology Conf.: Advances in Cryptology - CRYPTO'12, 2012, pp. 180-198.



**K ANIL** is an M.Tech Department of Computer Science & Engineering, Sreerama Institute of Technology & science, Penuballi Mandal, Khammam, Kotha Kuppenkuntla



**P. Karunakar Reddy** is an efficient teacher, received M.Tech from JNTU Kakinada is working as an Associate Professor in Department of C.S.E, Sree Rama Institute of Technology & Science, Kuppenakuntla, Penuballi, Khammam, TS,India. He has published many papers in both National & International Journals. His area of Interest includes Data Communications & Networks, Information Security, Database Management Systems, Computer



INTERNATIONAL JOURNAL OF ADVANCED RESEARCH  
IN COMPUTER SCIENCE AND ENGINEERING TECHNOLOGIES

ISSN : 2454-9924

Organization, C Programming and  
other advances in Computer  
Applications